





Gutter Nail Driver

Works anywhere to attach gutter to fascia with ease.

Use the Malco Gutter Nail Driver with hidden hangers and 8D galvanized nails to hang aluminum or steel gutters. A non-slip ergonomic grip provides multiple positions for grasping tool and working from above or below roof overhang. Durable 2-piece steel construction plus weather resistant zinc and nickel plating assure long service life of this professional quality tool.



WORKING FROM ABOVE



WORKING FROM BELOW

Catalog Number	Description	Length in. (mm)	Net Wt. oz. (g)
GND	Gutter Nail Driver	7-5/8 (194)	7 (199)




Not Recommended for Heavy Sheet Metal.

Snap Lock Punch

Ideal for crimping end caps on gutter.

Slide adjustment for throat depth allows settings from 1/4" to 5/8" (6 to 16 mm) depth. Also used to crimp end caps on gutter. Nickel plate and black oxide finish. Green grips. Formed metal cutting jaws.



Catalog Number	Throat Depth in. (mm)	Length in. (mm)	Net Wt. oz. (g)
SL2	1/4 to 5/8 (6.4 to 15.9)	8 (203)	16 (454)



Downspout Crimpers

5 Blade Crimper

Produces a double crimp that downsizes without deforming down-spout; walls stay square for a tight fitting, leakproof connection. Tool also features rust resistant plating. Non-slip vinyl grips with hand stops provide added comfort and resistance to elements.

Catalog Number	Throat Depth in. (mm)	Length in. (mm)	Net Wt. oz. (g)
C4	1-1/4 (31.8)	9 (229)	16 (454)

CAPACITIES

Material:	Aluminum	Copper	Stainless Steel 26 Gauge	Galvanized Steel 24-Gauge	Mild Steel 22-Gauge
Inches (mm)	.035 (0.89)	.023 (0.58)	.018 (0.46)	.028 (0.71)	.030 (0.76)

TOOL SPECIFICATIONS

Blades	Variable Leverage Ratio
Carbon Steel	High/Low Throughout Stroke
	7.1 to 1.0 - 9.8 to 1.0

REPLACEMENT SPRING FOR HAND TOOLS

5018 Fits SL2 and C4 (see page 19 for full list.)



Single Crimper


Light Duty tool without grips.

Makes a single crimp for downsizing aluminum downspouts.

Catalog Number	Throat Depth in. (mm)	Length in. (mm)	Net Wt. oz. (g)
SC2	1-1/8 (28.6)	8 (203)	8 (227)




Tools of the Trade-
Roofing, Siding and Gutter

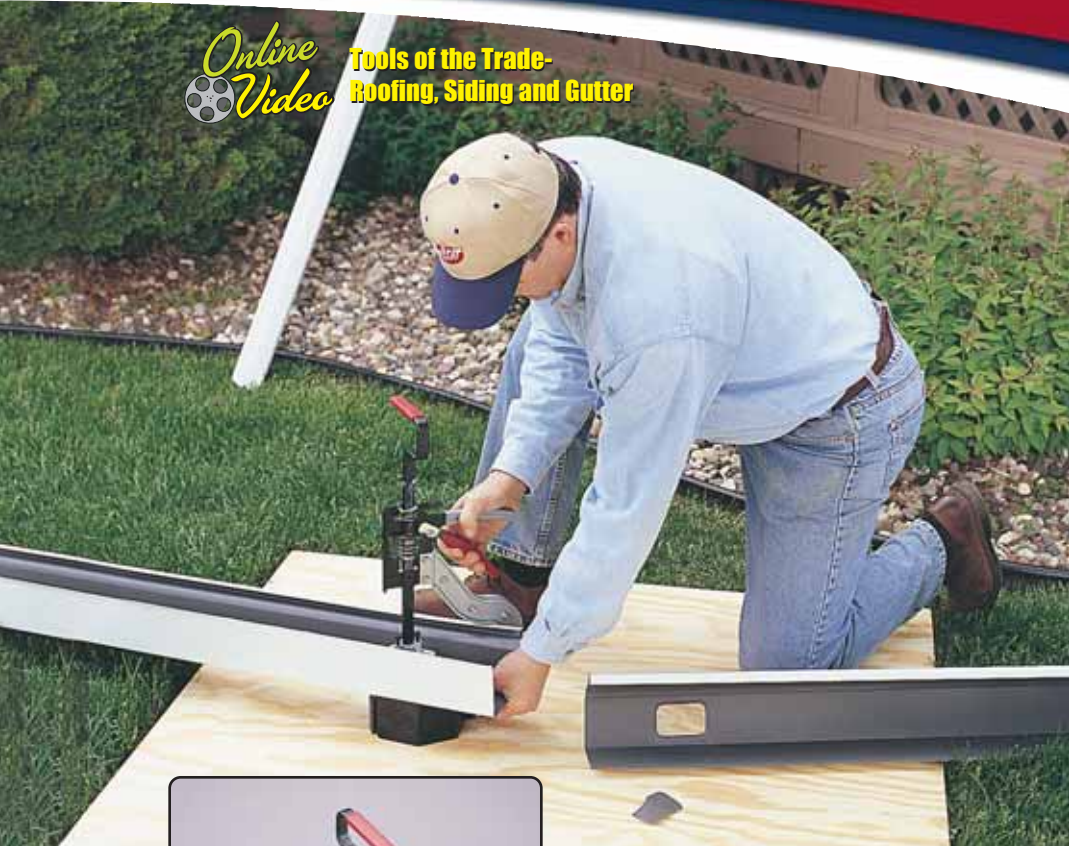

Gutter Outlet Punches

U.S. Patent No. 6,289,709



All Malco Gutter Outlet Punch and Dies make clean, accurate hole cuts in .032" (0.81 mm) aluminum gutter. Ample throat clearance allows these lightweight outlet punches to work over the front edge of gutter to quickly line up cuts. Fastener holes are provided in the tool frame base for optional bench mount application. An easy ratcheting mechanism and angled punch-blade provide smooth cutting action. High carbon steel blades on punches assure long service life and are also easily replaceable. Heat treated components and weather resistant finishes provide added tool strength and durability.




GOP23LUK
GOP23UK
GOP34UK




GOP23XUK

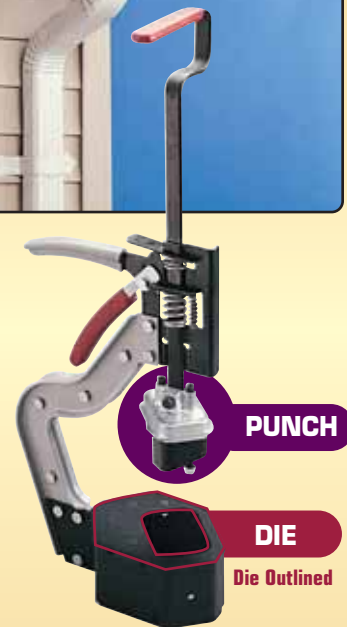

GOP23UK
GOP23LUK




GOP34UK



GOP23XUK

Malco Gutter Drops

True 2" x 3" (51x76 mm) and 3" x 4" (76x102 mm) dimensions are compatible with Malco's standard GOP23UK and GOP34UK punches.



GD23
2" x 3" (51x76 mm)
drop works with
Malco **GOP23UK**
outlet punch



GD34
3" x 4" (76x102 mm)
drop works with Malco
GOP34UK outlet punch

Catalog Number	Description
GD23	2" x 3" (51 x 75 mm) Aluminum Gutter Drop
GD34	3" x 4" (76 x 102mm) Aluminum Gutter Drop

OVERSIZE DROPS:

Larger nominal 2" x 3" (56x81 mm) drops compatible with the GOP23LUK include:
AMERIMAX • BERGER BROTHERS • BUCHNER MFG. • CLENDON • GUTTER SUPPLIERS
LYNCH ALUMINUM • METALTECH • MATTEO ALUMINUM • PETIT • RAYTEC • US ALUMINUM

TOOL FRAME (Order punch & Die Set Separately)

Catalog Number	Description	Frame Dim's in. (cm)	Net Wt. lbs. (kg)
GOT	Tool Frame	19x10 (48x25)	6.70 (3.04)
GOTRC	Replacement Checks		

PUNCH AND DIE ASSEMBLIES

Catalog Number	Description	Net Wt. lbs. (kg)
----------------	-------------	----------------------

2.2" x 3.2" (56 x 81 mm)

OVERSIZE Rectangular Hole (See list of oversize drops at left.)

GOP23LUK	Punch and Die Assy - Upgrade Kit	2.20 (1.00)
GOP23LRB	Replacement Blade	1.30 (0.60)

2" x 3" (51 x 76 mm) Standard Rectangular Hole

(Works with Malco GD23 and other true 2" x 3" drops.)

GOP23UK	Punch and Die Assy - Upgrade Kit	2.20 (1.00)
GOPRB	Replacement Blade	1.30 (0.60)

3" x 4" (76 x 102 mm) Standard Rectangular Hole

(Works with Malco GD34 and other true 3" x 4" drops.)

GOP34UK	Punch and Die Assy - Upgrade Kit	2.50 (1.13)
GOP34RB	Replacement Blade	1.80 (0.82)

2" x 3" (51 x 76 mm) X-Style

(No drop required. Fasten downspout securely to ears created by X.)

GOP23XUK	Punch and Die Assy - Upgrade Kit	1.90 (0.86)
GOP23XRB	Replacement Blade	

